

This Page Is Inserted by IFW Operations
and is not a part of the Official Record

BEST AVAILABLE IMAGES

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images may include (but are not limited to):


- BLACK BORDERS
- TEXT CUT OFF AT TOP, BOTTOM OR SIDES
- FADED TEXT
- ILLEGIBLE TEXT
- SKEWED/SLANTED IMAGES
- COLORED PHOTOS
- BLACK OR VERY BLACK AND WHITE DARK PHOTOS
- GRAY SCALE DOCUMENTS

IMAGES ARE BEST AVAILABLE COPY.

As rescanning documents *will not* correct images,
please do not report the images to the
Image Problem Mailbox.

<p>(51) International Patent Classification ⁵ : G21G 1/04 // G21J 3/00</p>	<p>A1</p>	<p>(11) International Publication Number: WO 91/17548 (43) International Publication Date: 14 November 1991 (14.11.91)</p>
<p>(21) International Application Number: PCT/HU90/00031 (22) International Filing Date: 3 May 1990 (03.05.90) (71)(72) Applicant and Inventor: TELEKI, Péter [HU/HU]; Bocskai u. 30, H-2400 Dunaújváros (HU). (74) Agent: DANUBIA; P.O. Box 198, H-1368 Budapest (HU). (81) Designated States: AT (European patent), AU, BE (European patent), BR, CA, CH (European patent), DE (European patent)*, DK (European patent), ES (European patent), FR (European patent), GB (European patent), HU, IT (European patent), JP, KR, LU (European patent), NL (European patent), SE (European patent), SU, US.</p>		<p>Published With international search report.</p>

(54) Title: ARRANGEMENT FOR CARRYING OUT INVESTIGATIONS OF ENERGETIC PROCESSES ON THE LEVEL OF ELEMENTARY PARTICLES AND FOR INVESTIGATING SUBSTRUCTURE OF THE MATERIAL

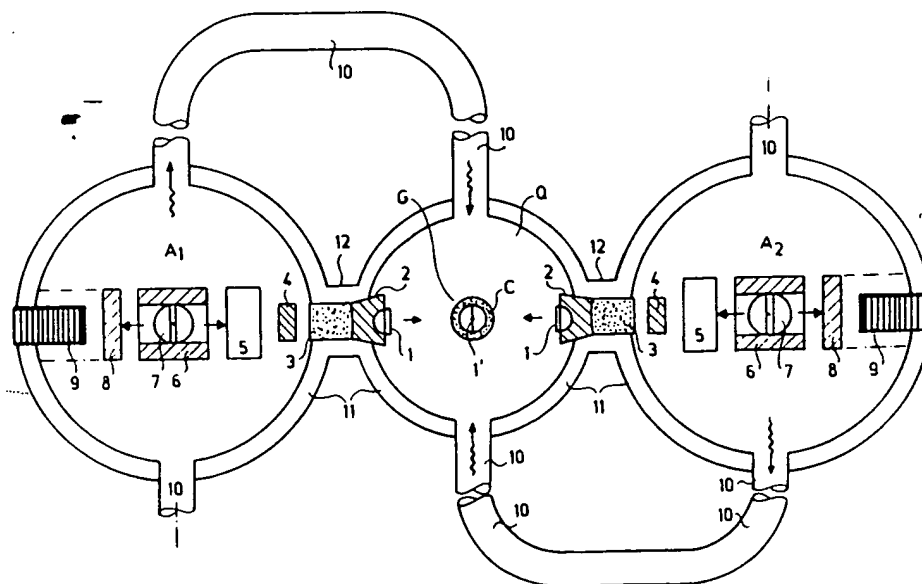

(57) Abstract

The invention refers to an arrangement for carrying out scientific investigations of energetic processes on the level of elementary particles and for investigating substructure of the material, comprising means for accelerating material parts constituting targets (2) in order to arrange their collision, wherein the accelerating means are formed by fission elements (7) placed on a common line with the targets (1) lying in equal distance from a middle point, the fission elements (7) acting by their nuclear reaction on the targets (1) causing their movement with substantially equal speed to the middle point.

DESIGNATIONS OF "DE"

Until further notice, any designation of "DE" in any international application whose international filing date is prior to October 3, 1990, shall have effect in the territory of the Federal Republic of Germany with the exception of the territory of the former German Democratic Republic.

FOR THE PURPOSES OF INFORMATION ONLY

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AT	Austria	ES	Spain	MG	Madagascar
AU	Australia	FI	Finland	ML	Mali
BB	Barbados	FK	France	MN	Mongolia
BE	Belgium	GA	Gabon	MR	Mauritania
BF	Burkina Faso	GB	United Kingdom	MW	Malawi
BG	Bulgaria	GN	Guinea	NL	Netherlands
BJ	Benin	GR	Greece	NO	Norway
BR	Brazil	HU	Hungary	PL	Poland
CA	Canada	IT	Italy	RO	Romania
CF	Central African Republic	JP	Japan	SD	Sudan
CG	Congo	KP	Democratic People's Republic of Korea	SE	Sweden
CH	Switzerland			SN	Senegal
CI	Côte d'Ivoire	KR	Republic of Korea	SU	Soviet Union
CM	Cameroon	LI	Liechtenstein	TD	Chad
CS	Czechoslovakia	LK	Sri Lanka	TG	Togo
DE	Germany	LU	Luxembourg	US	United States of America
DK	Denmark	MC	Monaco		

ARRANGEMENT FOR CARRYING OUT INVESTIGATIONS OF
ENERGETIC PROCESSES ON THE LEVEL OF ELEMENTARY
PARTICLES AND FOR INVESTIGATING SUBSTRUCTURE
OF THE MATERIAL

FIELD OF INVENTION

10

The present invention refers to an arrangement for carrying out investigations of energetic processes on the level of elementary particles and for investigating substructure of the material, comprising means for accelerating material parts constituting targets in order to arrange their collision.

BACKGROUND OF THE INVENTION

The production of superheavy elements having atomic number exceeding 120 is a very important task forwarding the development of the science and opening new perspectives in methods of producing energy.

The production of heavy elements is based in the scientific laboratories on accelerating material fragments comprising preselected appropriate elements. The beams carrying the nuclei of the elements accelerated are taken in collision and the high-energy nuclei melt together, they may constitute in this way the nucleus of a new element. The investigations have proved the advantage of applying different and similar elements, too. The problem of the known methods and arrangements lies in the fact that they can apply only small material fragments and the collision of these small fragments can result only in small amounts of the new elements to be produced. The small fragments can not be applied in many cases for inves-

investigating the energetic processes taking place on the subatomic level because of the energy limits introduced by the inherent features of the accelerators.

Another important field of the scientific investigations of the material on atomic and subatomic level is the generation of different kinds of radiation which reflects the inner atomic and subatomic structure. The methods of producing mesons and other elementary particles are therefore of utmost importance in looking for new kinds of processes which can be the basis of producing energy.

SUMMARY OF THE INVENTION

The invention is based on the recognition that the methods forming the basis of applying the ion accelerators can be used for producing new, superheavy elements only with limitations. The element to be produced can be characterized by atomic number at most 120 and mass number at most 480. This can be done also by colliding two uranium atoms. The present invention offers the possibility of applying the collision of two similar atoms (process denoted by AA). When making use of the collision of two different atoms, the process will be denoted by AB. The elements are appropriate which fulfil the condition that the sum of the two mass numbers is 431 and the sum of the atomic numbers is 169. This can be done e.g. by the collision of U 238 and Ir 193 or of Ra 226 and Tl 205 (the respective atomic numbers are: 92 for U, 77 for Ir, 88 for Ra and 81 for Tl). In the colliding beams the probability of processes of AA type is also relatively high because in the beams there are always more elements of the same kind present which can take part also in the collision.

From the processes having equilibrium state at mass number 480 and atomic number 120 can be expected that the nucleus is capable of being transformed into quark plasma state. This state cannot be stabilized, however, because the required pressure

and temperature conditions are possible to maintain only temporarily.

In the states below the equilibrium (e.g. the mentioned processes of uranium and iridium further radium and thallium) the quark plasma state cannot be follow. Furthermore, in the states produced e.g. by an uranium-collision the nucleus thus produced decays very quickly.

The invention is based on the recognition that in the nuclear radioactive processes the energy deliberated is generated by the kinetics of the collision. The kinetic energy can be sufficient for causing the collision of the elements in the target with composition AB in a way that the mass values AB in the reaction are with magnitudes higher than in the ion accelerators. The kinetic energy can be produced by nuclear explosion making use of small loads. This explosion should fulfill some conditions. The energy deliberated in the explosion must not cause scattering of the elements of the target (consisted of uranium and iridium or radium and thallium), but the heat energy of the explosion can help in the collision processes. A further recognition is that it is advantageous to accelerate simultaneously two targets and this requires practically the nuclear explosions initiated in the same moment in two places for carrying out the acceleration. The double explosion results in a high speed of the ions before the collision and the targets meet in their middle point. It is desired to give high strength the target therefore the elements constituting them are advantageously present in a common alloy or in a body made by sintering. They obviously can include some other components, especially of that kind which improve the strength parameters of the targets.

Hence, the present invention refers to an arrangement for carrying out investigations of energetic processes on the level of elementary particles and for investigating substructure of the material, comprising means for accelerating material parts constituting targets in order to arrange their

collision, and the essence of the invention lies in the solution that the accelerating means are formed by fission elements arranged on two sides of the targets on a common symmetry axis. the fission elements causing accelerating the material parts by
5 a nuclear process initialized between them.

In an advantageous embodiment of the arrangement proposed by the invention the fission elements are arranged in closed spaces communicating with a chamber receiving the targets.

10 In another advantageous embodiment of the arrangement proposed by the invention the chamber is separated from the closed spaces by respective connecting tubes receiving from the side of the closed spaces fusion mixtures for accelerating the targets.

15 In another preferred embodiment of the arrangement realized according to the invention in the closed spaces at their outer end X-ray lasers are arranged, separated from the fission elements by shields, wherein the fission elements are arranged in tubes made of steel or tungsten and between the
20 tubes and the fusion mixtures shield elements for neutron shielding are introduced.

If the conditions of the high accuracy collision of the targets can be done then it is preferred when in the middle point of the chamber an auxiliary target consisted of plutonium
25 is arranged.

In the three space embodiment of the arrangement defined above according to the invention it is preferred when the fusion mixtures are separated from the targets by respective vessels made of tungsten alloyed, if necessary with samarium, the vessels advantageously being covered by a beryllium layer
30 on their outer surface matching the connecting tubes and prepared for receiving the targets before their collision caused by nuclear processes.

In a further advantageous embodiment of the arrangement
35 built-up according to the present invention the construction

can be relatively simply applied for meson radiation investigations when the fission elements and the fusion mixtures are arranged in a common space comprising the chamber in the middle part wherein the fusion mixtures are completed by copper and placed in a tube made of tungsten or steel, separated from the fission elements arranged in respective tubes made of tungsten or steel by containers including neutron absorbing substance, especially water or paraffin and boron.

In a yet further advantageous embodiment of the arrangement built-up according to the features of the present invention the construction can be relatively simply applied for pion radiation investigations when the fission elements are arranged together with X-ray lasers in a common space comprising the chamber in the middle part, wherein the fission elements and the X-ray lasers are placed within respective tubes made of tungsten or steel and the fission elements are separated from the tube containing the X-ray lasers by respective containers including neutron absorbing substance, especially water or paraffin and boron.

A yet another very advantageous realization of the arrangement proposed by the invention very intensive meson and especially pion radiation can be generated when the fission elements are arranged in closed spaces preferably of ellipsoid shape communicating with a chamber filled out with a fusion mixture. at the outer surface, the closed spaces forming Teller-Ulam-mirrors, the fusion mixture protrudes into tube parts connecting the chamber with the closed spaces wherein the fusion mixture defines an inner space filled out in cylindric arrangement with an outer mantle made of material of high hydrogen content, particularly PTFE or polyethylene, a pipe element made of copper, a plutonium layer and a low critical mass fission element, preferably forming a wire made advantageously of californium, wherein the plutonium layer is separated from the pipe element and from the fission wire element by respective layers made of gold. It is proposed to

prepare the arrangement of the invention in the way that the closed spaces together with the chamber are arranged along a longitudinal axis of symmetry, wherein the fission elements and the targets lie on the axis of symmetry.

5 The most preferred choice of the materials applied in the arrangement of the invention is the following: the targets consist of at least one mixture comprising uranium and iridium or thallium and gold and the fusion mixtures comprise two lithium isotopes Li 6 and Li 7 and deuterium and tritium (i.e. H 2 and H 3).

10 The X-ray lasers are advantageously realized on the basis of tungsten plates covered from one side by boron and copper and from the other side by molybdenum and copper, wherein the space between the plates is filled out with PTFE or polyethylene.

15 The arrangements proposed by the present invention can be created by the means of known solutions and they offer the possibility of carrying out scientific investigations on the basis of material fragments having mass remarkably exceeding the mass of the targets applicable in the accelerators applied for such investigations.

BRIEF DESCRIPTION OF THE DRAWINGS

25 The invention will be further described in more detail with reference to some advantageous embodiments and realizations. In this description reference will be made to the attached drawings showing a schematic cross-section of the arrangement to be applied. In the drawings

30 **FIG. 1** shows the schematic cross-section of an arrangement to be applied for producing super heavy elements by causing heavy metallic particles collide,

FIG. 2 shows the schematic cross-section of an arrangement to be applied for investigating X-ray radiation generated by accelerated material fragments,

35

laminated bodies. The outer walls 11 are connected with light conductors 10 arranged perpendicularly to the line connecting the fission elements 7. Between the chamber Q and spaces A_1 and A_2 connecting tubes 12 are built-in. The targets 1 are arranged in respective vessels 2 made of tungsten, samarium and covered if necessary by beryllium. The fusion mixtures 3 are separated from the containers 5 by shield elements 4 made of boron and samarium. In some cases it is advantageous to apply in a central space G of the closed space Q an auxiliary target 1', as it will be described below in more detail.

As it is shown in Fig. 2, a relatively simple arrangement can be created for investigating the X-ray radiation generated by accelerated material fragments as fission products in a chamber Q determined by an outer wall 11 made of steel or other high strength material. In the chamber Q spaces A_1 and A_2 can be defined for receiving two nuclear fission elements 7 arranged along a longitudinal symmetry axis and the fission elements 7 lie in the interior of tube elements 6 acting as collimator and made of tungsten or steel. Between the fission elements 7 along the symmetry axis defined by them two containers 5 are applied which include water or paraffin and boron (^{10}B). The containers 5 lie at two openings of a further tube element 6 including two X-ray laser means 9 radiating in opposite directions. The laser 9 is made of a material system including plates and high hydrogen content plastic therebetween, wherein the plates consist of tungsten (^{183}W) covered from one side by boron and copper, and by molybdenum and copper on the other side.

A similarly simple arrangement can be realized according to Fig. 3 which is intended to be used in carrying out meson radiation investigations. In this arrangement instead of X-ray lasers 9 of Fig. 2 in the middle part of the chamber Q a fusion member is arranged which consists of a two fusion mixtures 7 comprising two lithium isotopes ($\text{Li } 6$ and $\text{Li } 7$) and two hydrogen isotopes ($\text{H } 2$, i.e. deuterium and $\text{H } 3$, i.e. tritium) and

copper. The fusion mixtures 3 are arranged at the two openings of a tube element 6 and limits a central space G with a middle point being the place of collision and covering the centre of gravity of the fusion mixtures 3.

5 In the arrangement illustrated in Fig. 4 and Fig. 5 the pion radiation can be investigated. This arrangement is also, as that of Fig. 1 is divided into three parts, i.e. a chamber Q being the middle part of the arrangement and two closed spaces denoted by A_1 and A_2 . The chamber Q limited from two sides by
 10 the closed spaces A_1 and A_2 is shown in cross-section A-A in Fig. 5. The closed spaces denoted by A_1 and A_2 advantageously constitute ellipsoid shaped bodies comprising in one focus point respective fission elements 7 arranged on an axis being the symmetry axis of the middle part and separated from the
 15 middle part by screening elements 4 made of boron and samarium. The middle part, i.e. the chamber Q is limited from two side and is surrounded by a fusion element 3 consisted of two lithium isotopes (Li 6 and Li 7) and two hydrogen isotopes (H 2, i.e. deuterium and H 3, i.e. tritium). The fusion element
 20 3 constitutes an axialsymmetric body defining a central part which is limited from two sides on the symmetry axis by two screening elements 4 made of boron and samarium. Within the fusion element 3 there is a cylindric inner body D limited in axial direction by further two screening elements 4 made of
 25 boron and samarium and in radial direction with an inner mantle 13 made of polyethylene and/or PTFE (e.g. teflon). The mantle 13 surrounds (Fig. 5) a pipe element 14 made of copper which comprises a material system including a small critical mass fission body prepared advantageously in the form of a californium wire 16 arranged along the symmetry axis and being covered
 30 by a plutonium layer 15 separated by respective layers 17 and 18 made of gold from the californium wire 16 and from the copper pipe element 14. The fusion element 3 preferably has protrusions 3' limited by a spherical surface in the closed
 35 spaces A_1 and A_2 , wherein the centre of the spherical surface

lie in the other focus point of the closed spaces A_1 and A_2 forming thereby Teller—Ulam-mirrors.

In the arrangement built-up according to Fig. 1 the targets 1 are consisted of at least one mixture made respectively of uranium and iridium or radium and thallium or gold and thorium (U 238, Ir 193; Th 232, Au 197). Of course, this is not the complete list, other appropriate elements (metals) can be applied, too. The targets 1 are hemispheres or other symmetric bodies forming together a sphere. The nuclear reaction caused by the X-ray lasers 9 in the fission elements 7 initiates a fusion reaction in the fusion mixtures 3 and the fusion reaction results in accelerating the targets 1. In this way about 80 % of the energy of the nuclear reactions may be usefully applied for generating kinetic energy. The accelerated targets 1 represent high mass, i.e. in the contrary to the ion accelerators the arrangement of the invention is capable of making relatively big material fragments react one with another. The arrangement of the invention works on the basis of a simultaneous nuclear reaction resulting in a meeting of the targets 1 in the middle part (central space G) of the chamber Q and in forming thereby a united charge C. Of course, the high strength of the targets 1 is required. In this arrangement the radiation can be kept within the closed spaces A_1 , A_2 and the chamber Q.

By the process realized in the arrangement of the invention it is possible to increase the kinetic energy of the targets 1 by the means of the shock waves, thermal radiation and gamma radiation of the nuclear reactions. The shock wave is capable of increasing the density of the united charge C and the thermal effects result in increased temperature which is also helpful in producing superheavy elements. If the shock wave and the thermal radiation can be generated in a correlated manner then a fusion charge 3 can be helpful in further increasing the energy acting on the targets 1. The fusion charge 3 can be made of a mixture including two isotopes of lithium

(Li 6 and Li 7), deuterium (H 2) and tritium (H 3) wherein the components are arranged in an absorbent medium in order to form a shell on the united charge C. The fusion charge is then initialized to burn out by nuclear charges and this ensures
 5 that the united charge is exposed to the increasing action of energy waves acting in a time sequence in different moments. In this way it is supposed to ensure a very high energy density state of plasma consisted of quarks.

When preparing the fusion charges 3 the outer surface of
 10 the vessels 2 is advantageously covered by a thin beryllium mirror (reflecting surface) generating neutrons necessary for the operation of the fusion charge 3. The neutrons are absorbed in the material of the vessels 2. The mentioned "package" of the targets 1 should be kept together up to the moment of the
 15 required action and therefore it is necessary to apply a medium transmitting the shock waves which can be completed with at least one component capable of decelerating the neutrons. On this basis it is advantageous to arrange the containers 5 within the spaces denoted by A_1 and A_2 , the containers 5 comprising water, paraffin and boron. The package of the targets 1
 20 may require protection against neutrons and this prefers the application of the special shield elements 4 made of boron, cadmium, samarium or other appropriate materials. Another possibility is to prepare the shield elements 4 from more metallic
 25 layers arranged perpendicularly to the direction of the radiation acting in the system.

Because of the explosive processes the arrangements consisting of the fission element 7 arranged within the tube 6, the container 5, the shield element 4, the fusion charge 3,
 30 the vessel 2 and the target 1 (in the order listed up and in a reverse order, when looking from the middle part of the chamber Q) have high impulse therefore balancing means are necessary. These means consist of two part, the shield 8 and the X-ray laser or high energy X-ray generator 9 consisting of parallel
 35 tungsten plates lying perpendicular to the longitudinal axis of

the arrangements listed up. The tungsten plate are completed by copper and boron from one side and by molybdenum and copper from the other side, the mentioned metals forming e.g. alloyed outer layers of a thicker tungsten plate. The different kinds of radiation and the particles impacting on the surface of the tungsten plates cause emission of very high intensity X-ray radiation leaving the system in the direction of the axis, i.e. of the targets 1. Thus, the X-ray radiation has an auxiliary effect resulting in increasing ionization of the targets 1 which should be in movement in the moment of generating this radiation.

The boron layer of the tungsten plates should be arranged on their side directed to the fusion charge because the boron layer has to transform neutrons into alpha-particles. The molybdenum layer should cover the other side of the tungsten plates. The molybdenum layer or the alloyed surface layer of tungsten comprising molybdenum is intended to increase the heat capacitance of the tungsten plate (it should be noted that the vessel 2 can be made also of a material comprising less or more molybdenum). On both sides of the tungsten plate it is advantageous to prepare a covering layer consisted of copper offering the advantage of being excited prior to molybdenum. In this way the copper ensures X-ray radiation exciting also the particles of molybdenum. Between the tungsten plates there are always free spaces - they should be filled with polyethylene or PTFE (teflon). The tungsten plates of the X-ray laser 9 or X-ray generator ensure relatively low auxiliary energy but in appropriate moments the small energy parts can be also very important for increasing the energy of the targets 1.

The fusion element 7 is arranged in a tube 6 made of tungsten in order to direct to the target 1 as much energy and as many particles and material fragments as possible.

The energy propagation conditions can be influenced in an advantageous manner when the fusion elements 7 are arranged in the middle part of spherical shaped spaces A_1 and A_2 , the

targets 1 meet one another also in the central point of a spherical space Q. A further step for stabilizing the united charge C in the central point of the space Q can be proposed, too: at least a part of the energy resulting from the fusion elements 7 in form of light and thermal radiation can be transmitted to the space Q by the means of the light conductors 10. The light conductors are constituted by pipelines connecting the spaces denoted by A_1 and A_2 with the central space Q. The light and thermal energy can be also helpful in stabilizing the united charge C and improving its energy balance.

The explosion processes in the spaces A_1 and A_2 result in a high speed movement of the targets 1 and in remarkable increase of their density. This is to be taken into account when computing the critical mass of the fusion processes. There is no problem when applying the uranium and iridium and/or the radium and thallium or gold and thorium mixtures, the first of them including if necessary thorium and gold. The mixtures can constitute alloys of the mentioned components. In the case of the transuranium elements the meeting of the parts of the targets 1 in the manner shown above can not be arranged. Hence, it is proposed to place and fix in the central space G of the closed space Q a further auxiliary target 1' consisted of e.g. plutonium in a form that it will constitute together with the targets 1 on their impacting a sphere. This solution makes it necessary to arrange the collision of the targets in the moment when their centre of gravity lies in the middle point of the space Q with accuracy ± 0.1 mm. If the mentioned mixtures are applied the auxiliary target 1' is not required and the accuracy can be also lower: the centre of gravity of the targets 1 may be kept in a distance up to 10 mm from the middle point of the space Q.

The arrangement shown in Fig. 1 is proposed especially for carrying out scientific investigations directed to the problems of generating and producing superheavy elements. The targets 1 consisted of mixtures (alloys) made of uranium and

iridium and/or of radium and thallium, the arrangement illustrated in Fig. 1 can be realized without technical problems and other target compositions can be applied, too, e.g. uranium and copper. The arrangement of Fig. 1 built-up according to the invention offers the advantage that in comparison to the known and presently applied accelerating means the masses taken into collision can be very high and it can be realized with lower costs than the accelerators.

The arrangement proposed by the present invention can be constructed in the form of the less sophisticated embodiment shown in Fig. 2. In this case the collision of appropriate parts of two fission charges 7 arranged in respective tube elements 6 made of steel or tungsten on two sides of a bidirectionally radiating X-ray laser means 9 is generated. The X-ray laser means 9 are realized in a similar manner as shown in and described in connection with Fig. 1 by tungsten plates covered from one side by boron and copper and from the other side by molybdenum and copper. The containers 5 separate the tube elements 6 receiving the fission elements 7 from the tube element 6 of the X-ray laser means 9. The high intensity X-ray radiation generated by the X-ray laser means 9 results in accelerating of different material fragments which by their collision produce high intensity X-ray radiation. The radiation has to be detected in order to investigate the energetic processes on the subatomic level, the processes having place between the elementary particles.

The simple arrangement of the present invention shown in Fig. 3 is intended to make use of atomic processes to carry out investigations of meson radiation, and especially of the pion radiation.

The high energy protons of energy exceeding about 310 MeV are generated in the fission elements 7 and act on targets constituted by fusion charges 3 consisted of copper and the usual isotopes applied in the fusion processes (Li 6 and Li 7 together with the deuterium and tritium, H 2 and H 3). The

target can be made of other elements of low atomic number, e.g. of beryllium or pure copper). The energy limit about 310 MeV is required for generating elementary particles. The presence of the hydrogen in the targets is highly preferred because by
 5 applying charged pions in the hydrogen neutral pions can be generated. The neutral pions show gamma-decay of energy 70 MeV and 131 MeV.

The intensity of the gamma radiation originated from the decay of the neutral pions can be as many as hundred times
 10 higher than the intensity of the other processes. This energy is capable of causing nuclear reactions, e. g. the decay of oxygen atoms to alpha particles. The protons can be produced from compositions comprising hydrogen. The sufficient amount of hydrogen can be comprised in chemical charges or in composi-
 15 tions forming the targets. The targets 1 bombarded by protons advantageously consist of Li 9, F 9, Sc 21, Cu 29 (lithium, fluor, scandium and copper). The parts made of beryllium have to constitute sources of positively and negatively charged pions. In the arrangement of Fig. 1 respective beryllium layers
 20 are preferably applied on the vessels 2 and therefore here and in lithium bombarded by protons pions are generated. The targets comprising hydrogen are very important because the hydrogen constitute always the source of protons and the atoms as targets of negative pions generate neutral pions issuing gamma
 25 radiation.

In the arrangement shown in Fig. 3 the fusion mixtures 3 united by a collision process can be completed by copper. The negative pions producing also negative mions by their decay show catalytic effect because they make nuclear reactions pos-
 30 sible at relatively low energy. They can improve the energy balance of the energetic reactions.

The arrangement shown in Fig. 4 and Fig. 5 is surrounded by outer walls 11 of high mechanical strength which forms a pipe type element. With the inner surface of this pipe is a
 35 fusion mixture 3 kept in touch which is covered from both sides

by respective beryllium layers. In the central axis of this pipe shaped fusion mixture 3 the fission element is arranged: this is light body of critical mass being as small as possible. Therefore the californium wire 16 is preferred which is surrounded by a plutonium layer 15 covered from inside and outside by the gold layers 17 and 18. The outer gold layer 18 contacts a copper mantle 14 acting as pion source, the pions influencing the processes taking place in the californium wire 16. The space between the fission wire 16 and the fusion mixture 3 is filled out with polyethylene and/or PTFE (teflon) forming an inner mantle 13 comprising hydrogen in order to ensure protons bombarding copper. The filling is capable of fixing the fission wire. Teflon is of advantage that it comprises fluor which can take part in generating the negative pions.

The filling made of material of high hydrogen content should preferably be solid, however, the gaseous and eventually the liquid compositions may be applied if required. The solid filling has the advantage that it can be equipped with a beryllium layer on inner and/or outer side in the case of any material. The arrangement of Figure 4 should be initiated in a traditional manner. The fusion mixture 3 generates during its fusion reaction negative pions which enter the material of the fission element, i.e. the californium wire 16. In this way a chain reaction can be initialized. When applying PTFE (teflon) the fluor present therein constitutes also a source of negative pions which colliding with the nuclei of the hydrogen atoms generate neutral pions. In this way very intensive X-ray radiation comes into being and the direction where this radiation propagates lies oppositely to the direction of propagating the reaction in the fusion mixture.

The arrangement shown in Fig. 4 can be applied also in a multiplied system comprising more than one of this arrangements. The tube shaped outer walls 11 should be in this case of equal length.

The different embodiments of the arrangement proposed by

the present invention offers the relatively low cost possibility of carrying out investigations in material systems, producing new elements and seeking for new kinds of energy producing reactions.

WHAT I CLAIM IS:

5
 1. An arrangement for carrying out investigations of energetic processes on the level of elementary particles and for investigating substructure of the material, comprising means for accelerating material parts constituting targets in
 10 order to arrange their collision, **characterized in that** the accelerating means are formed by fission elements (7) placed on a common line with the targets (1) lying in equal distance from a middle point, the fission elements (7) acting by their nuclear reaction on the targets (1) causing their movement with
 15 substantially equal speed to the middle point.

2. The arrangement as set forth in claim 1, **characterized in that** the fission elements (7) are arranged in closed spaces (A_1 , A_2) communicating with a chamber (Q) receiving the targets (1) and the middle point, the closed spaces
 20 (A_1 , A_2) and the chamber (Q) forming a system having two symmetry axis, one of them crossing the middle point.

3. The arrangement as set forth in claim 2, **characterized in that** the chamber (Q) is separated from the closed spaces (A_1 , A_2) by respective connecting tubes (12) receiving
 25 from the side of the closed spaces (A_1 , A_2) fusion mixtures (3) for accelerating the targets (1), wherein the targets (1) are arranged in the outlets of the connecting tubes (12) on the side of the chamber (Q).

4. The arrangement as set forth in claim 3, **characterized in that** in the closed spaces (A_1 , A_2) at their outer
 30 end X-ray lasers (9) are arranged, separated from the fission elements (7) by shields (8), wherein the fission elements (7) are arranged in tubes (6) made of steel or tungsten and between the tubes (6) and the fusion mixtures (3) shield elements (4)
 35 for neutron shielding are introduced.

5. The arrangement as set forth in any of claims 1 to 4, **characterized in that** in the central space (G) of the chamber (Q) receiving the middle point an auxiliary target (11) consisted of plutonium is arranged.

6. The arrangement as set forth in any of claims 3 to 5, **characterized in that** the fusion mixtures (3) are separated from the targets (1) by respective vessels (2) made substantially of tungsten, the vessels (2) being arranged in the connecting tubes (12).

7. The arrangement as set forth in claim 6, **characterized in that** the vessels are made of tungsten alloyed with samarium.

8. The arrangement as set forth in claim 6 or 7, **characterized in that** the vessels (2) are covered by a beryllium layer on their outer surface matching the connecting tubes (12).

9. The arrangement as set forth in claim 1, **characterized in that** the fission elements (7) and the fusion mixtures (3) are arranged in a common space comprising a chamber (Q) in the middle part for receiving the targets (1) wherein the fusion mixtures (3) are completed by copper and placed in a tube (6) made of tungsten or steel, separated from the fission elements (7) arranged in respective tube elements (6) by containers (5) including neutron absorbing substance, the tube elements (6) made of tungsten or steel.

10. The arrangement as set forth in claim 9, **characterized in that** the containers (5) include as neutron absorbing substance water or paraffin and boron.

11. The arrangement as set forth in claim 1, **characterized in that** the fission elements (7) are arranged together with X-ray lasers (9) in a common space comprising the chamber (Q) in the middle part, wherein the fission elements (7) and the X-ray lasers (9) are placed within respective tube elements (6) made of tungsten or steel and the fission elements (7) are separated from the tube elements (6) containing the X-

-ray lasers (9) or high intensity X-ray generator by respective containers (5) including neutron absorbing substance.

12. The arrangement as set forth in claim 11, **characterized in that** the containers (5) include as neutron absorbing substance water or paraffin and boron.

13. The arrangement as set forth in claim 1, **characterized in that** the fission elements (7) are arranged in closed spaces (A_1 , A_2) communicating with a chamber (Q) filled out with fusion mixture (3) at the outer surface, the fusion mixture (3) protrudes through respective tube parts (12) into the closed space (A_1 , A_2) and connecting by their protrusions (3') the chamber (Q) with the closed spaces (A_1 , A_2) wherein the fusion mixture (3) defines and surrounds an inner space filled out with a cylindric inner body (D) arranged with an outer mantle (13) made of a material of high hydrogen content, particularly PTFE or polyethylene, a pipe element (14) made of copper, a plutonium layer (15) and a low critical mass fission wire (16), wherein the plutonium layer (15) is separated from the pipe element (14) and from the fission wire (16) by respective layers (17, 18) made of gold.

14. The arrangement as set forth in claim 13, **characterized in that** the low critical mass fission wire (16) is made of californium.


15. The arrangement as set forth in any of claims 1 to 10, **characterized in that** the closed spaces (A_1 , A_2) together with the chamber (Q) are arranged having a longitudinal axis of symmetry, wherein the fission elements (7) and the targets (1) lie on the axis of symmetry.

16. The arrangement as set forth in any of claims 13 to 15, **characterized in that** the closed spaces (A_1 , A_2) are made in the shape of ellipsoid bodies, having the fission elements (7) and the protrusions (3') of the fusion mixture (3) in the focus points of the ellipsoids, the focus points lying on the longitudinal symmetry axis of the closed spaces (A_1 , A_2) and the chamber (Q).

17. The arrangement as set forth in any of claims 13 to 16, **characterized in that** the fusion mixture (3) is limited on its surfaces matching the outer wall (11) and the inner mantle (13) by respective beryllium layers (19, 20).

5 18. The arrangement as set forth in any of claims 1 to 17, **characterized in that** the target (1) consists of a mixture comprising at least one pair of elements selected from the pairs consisted of uranium and iridium, thallium and radium, and thorium and gold and the fusion mixtures (3) comprise two
10 lithium isotopes Li 6 and Li 7 and two hydrogen isotopes, i.e. deuterium and tritium.

15 19. The arrangement as set forth in any of claims 3 to 11, **characterized in that** the X-ray lasers (9) are built-up with tungsten plates covered from one side by boron and copper and from the other side by molybdenum and copper, wherein the space between the plates is filled out with PTFE or polyethylene.

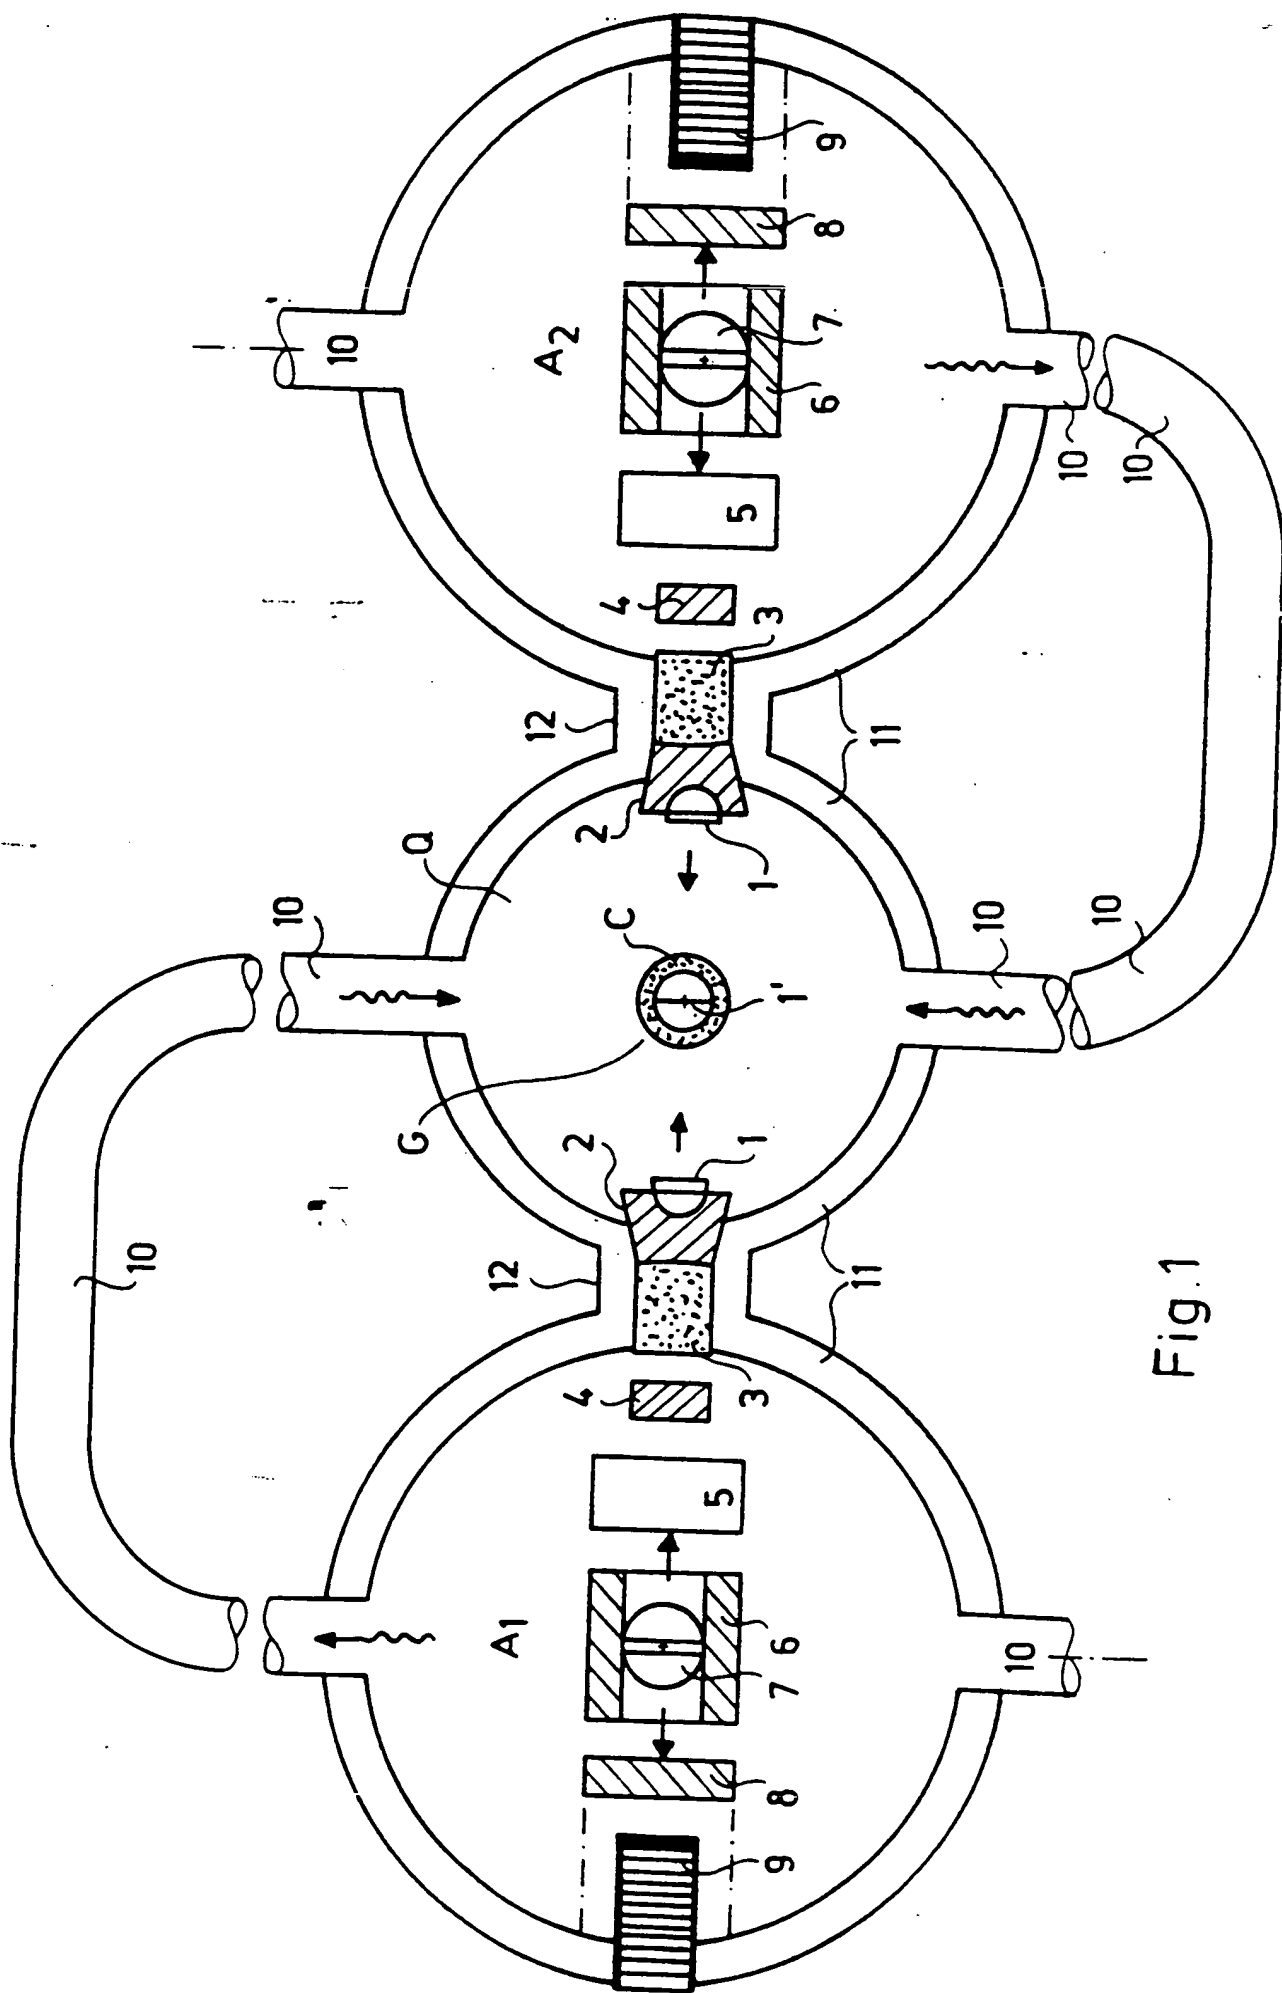

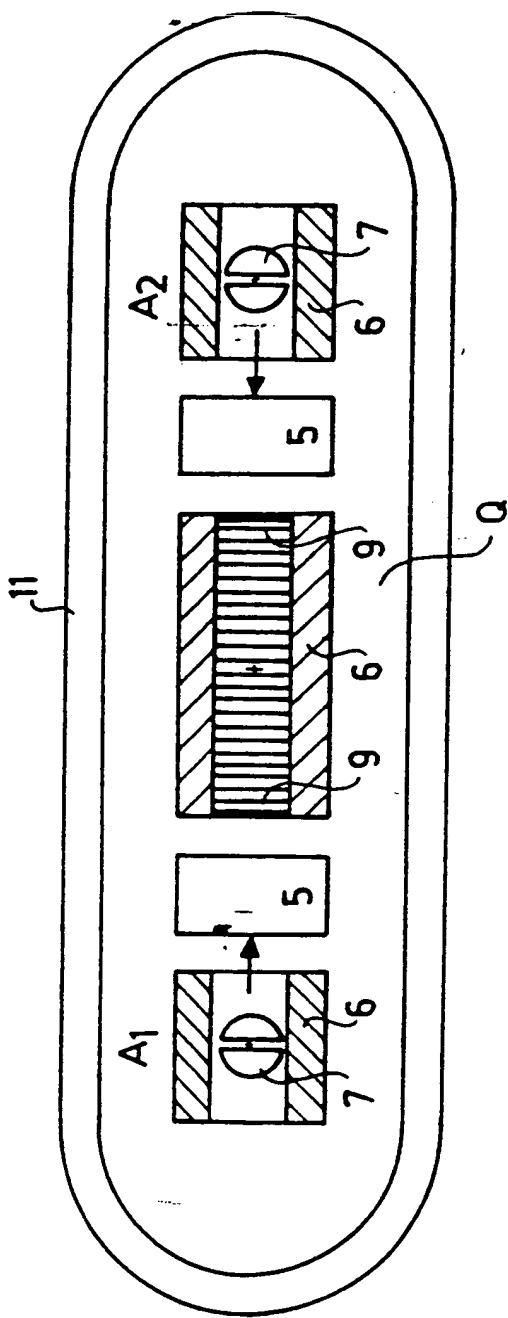


Fig. 2

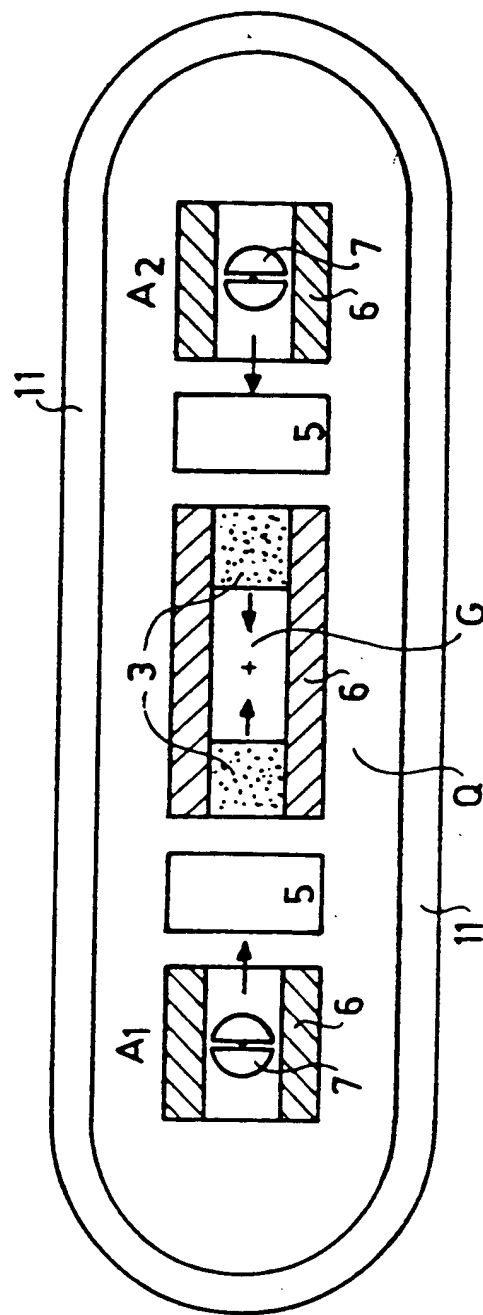


Fig. 3

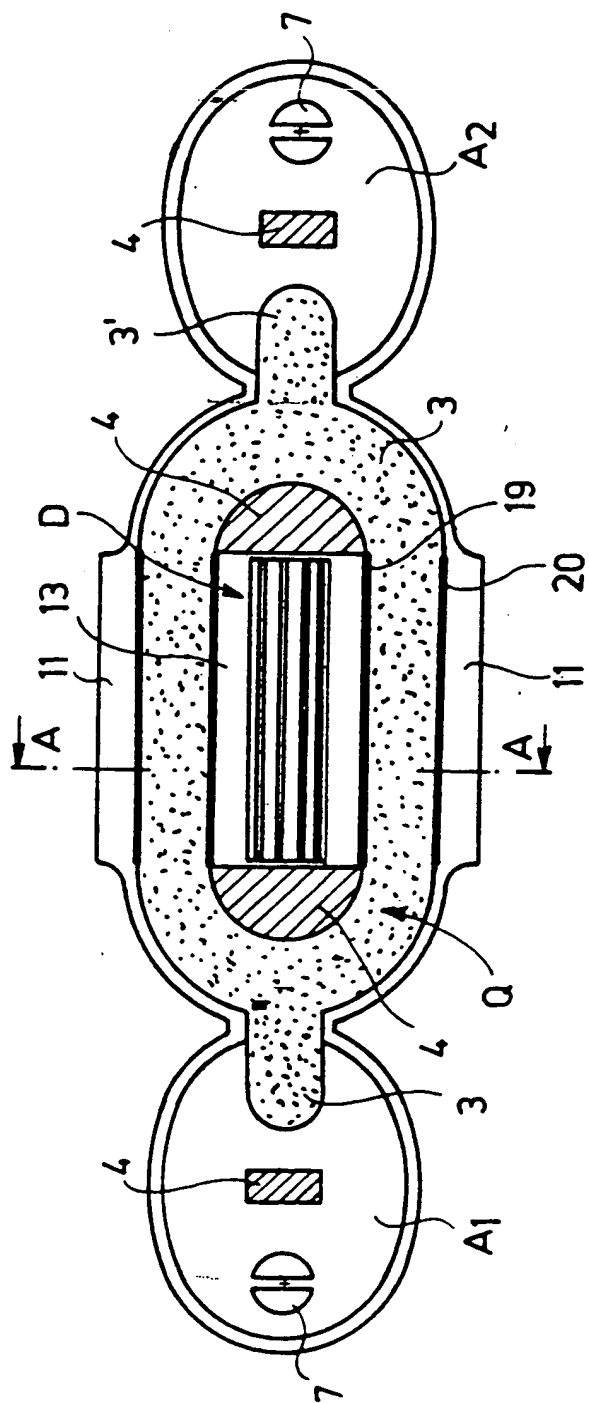


Fig. 4

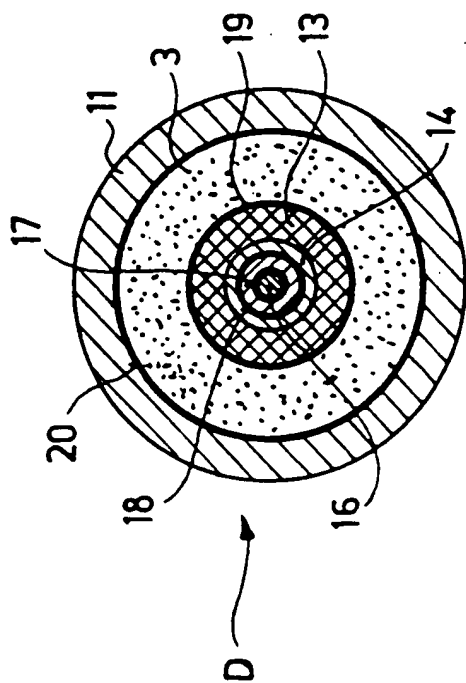


Fig. 5

I. CLASSIFICATION SUBJECT MATTER (If several classification symbols apply, indicate all) *

According to International Patent Classification (IPC) or to both National Classification and IPC

IPC⁵: G 21 G 1/04 // G 21 J 3/00**II. FIELDS SEARCHED**Minimum Documentation Searched ⁷

Classification System

Classification Symbols

Int.Cl.⁵

G 21 G 1/00, 1/04, 1/10; G 21 K 1/00, 1/08, 5/00-5/10;
 H 05 H 3/00, 3/06, 5/00, 5/03, 5/06, 9/00, 15/00;
 G 21 J 1/00, 3/00

Documentation Searched other than Minimum Documentation
 to the Extent that such Documents are Included in the Fields Searched *

III. DOCUMENTS CONSIDERED TO BE RELEVANT *

Category *	Citation of Document, ¹¹ with indication, where appropriate, of the relevant passages ¹²	Relevant to Claim No. ¹³
A	DE, A, 2 056 199 (GENSWEIN) 25 May 1972 (25.05.72), see fig. 12.	(1-4, 6, 9, 11, 15, 16)
A	GB, A, 1 446 671 (WINTERBERG) 18 August 1976 (18.08.76), see page 1, lines 41-57; page 2, lines 15-31; page 3, lines 29-34, 43-48; claims.	(1-5, 9)
A	FR, A, 1 350 078 (PEYRON) 22 April 1964 (22.04.64), see fig. 1, 2.	(1-3, 6, 9, 15, 16)
A	FR, A, 1 331 491 (SEPI) 06 November 1963 (06.11.63), see fig.	(1)

* Special categories of cited documents: ¹⁰

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier document but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.

"A" document member of the same patent family

IV. CERTIFICATION

Date of the Actual Completion of the International Search

Date of Mailing of this International Search Report


14 December 1990 (14.12.90)

18 December 1990 (18.12.90)

International Searching Authority

Signature of Authorized Officer

AUSTRIAN PATENT OFFICE



über die internationale
Patentanmeldung
Nr.

tional Patent Application
No. PCT/HU 90/00031

relatif à la demande de
brevet international
n°.

In diesem Anhang sind
die Mitglieder der
Patentfamilien der im
obengenannten interna-
tionalen Recherchenbe-
richt angeführten
Patentdokumente ange-
geben. Diese Angaben
dienen nur zur Unterrich-
tung und erfolgen ohne
Gewähr.

This Annex lists the patent
family members relating to
the patent documents cited
in the above-mentioned inter-
national search report. The
Austrian Patent Office is in
no way liable for these par-
ticulars which are merely
given for the purpose of in-
formation.

La présente annex indique
les membres de la famille d
brevets relatifs aux docu-
ments de brevets cités dans
le rapport de recherche inter-
national visé ci-dessus. Les
renseignements fournis sont
donnés à titre indicatif et
n'engagent pas la responsa-
bilité de l'Office autrichien
des brevets.

Im Recherchenbericht
angeführtes Patent-
dokument
Patent document cited
in search report
Document de brevet cité
dans le rapport
de recherche

Datum der
Veröffentlichung
Publication
date
Date de
publication

Mitglied(er) der
Patentfamilie
Patent family
member(s)
Membre(s) de la
famille de
brevets

Datum der
Veröffentlichung
Publication
date
Date de
publication

DE-A - 2056199

25-05-72

None

GB-A - 1446671

18-08-76

AU-A1-64249/74 10-07-75
BE-A1- 809586 02-05-74
BR-A0- 7400166 15-08-74
CH-A - 558973 14-02-75
DD- C- 111259 05-02-75
DE-A1- 2365115 18-07-74
ES-A1- 422246 01-07-77
ES-A5- 422246 01-08-77
FR-A1- 2214155 09-08-74
FR-B1- 2214155 09-09-77
IE-B - 38737 24-05-78
IL-A0- 43991 16-05-74
IT-A - 1006813 20-10-76
LU-A - 69111 02-04-74
NL-A - 7400162 16-07-74
PL- F- 88489 30-09-76
RO- F- 64303 15-03-79
SE-B - 396154 05-09-77
SE-C - 396154 15-12-77
TR-A - 18014 01-01-77
ZA-A - 7400111 24-12-74
ZM-A - 6/74 23-09-74

FR-A - 1330078

None

FR-A - 1331491

None

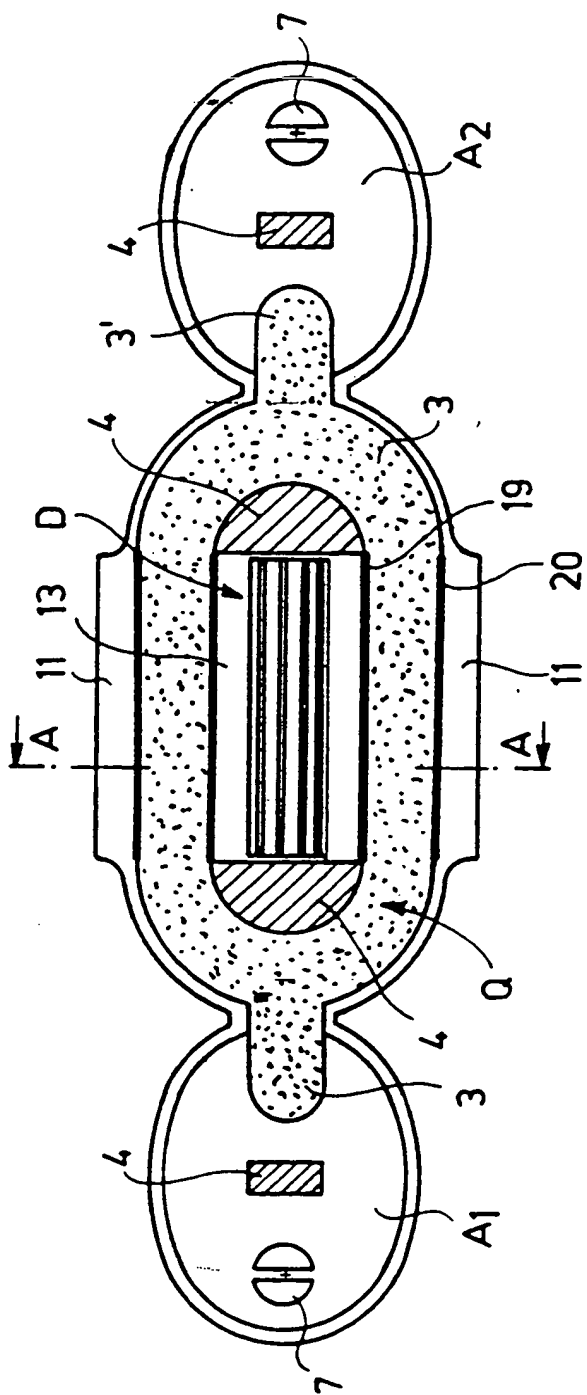


Fig. 4

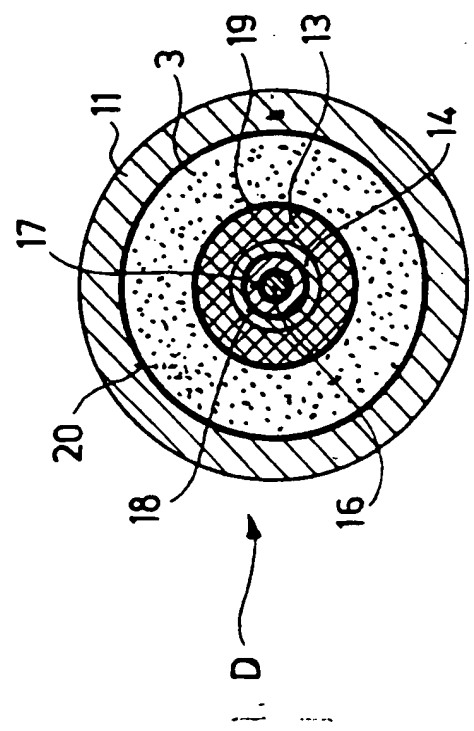


Fig. 5

I. CLASSIFICATION AND SUBJECT MATTER (If several classification symbols apply, indicate all) *

According to International Patent Classification (IPC) or to both National Classification and IPC

IPC⁵: G 21 G 1/04 // G 21 J 3/00**II. FIELDS SEARCHED**Minimum Documentation Searched ⁷

Classification System	Classification Symbols
Int.Cl. ⁵	G 21 G 1/00, 1/04, 1/10; G 21 K 1/00, 1/08, 5/00-5/10; H 05 H 3/00, 3/06, 5/00, 5/03, 5/06, 9/00, 15/00; G 21 J 1/00, 3/00

Documentation Searched other than Minimum Documentation
to the Extent that such Documents are Included in the Fields Searched ***III. DOCUMENTS CONSIDERED TO BE RELEVANT** *

Category *	Citation of Document, ¹¹ with indication, where appropriate, of the relevant passages ¹²	Relevant to Claim No. ¹³
A	DE, A, 2 056 199 (GENSWEIN) 25 May 1972 (25.05.72), see fig. 12.	(1-4,6,9,11, 15,16)
A	GB, A, 1 446 671 (WINTERBERG) 18 August 1976 (18.08.76), see page 1, lines 41-57; page 2, lines 15-31; page 3, lines 29-34, 43-48; claims.	(1-5,9)
A	FR, A, 1 350 078 (PEYRON) 22 April 1964 (22.04.64), see fig. 1,2.	(1-3,6,9,15, 16)
A	FR, A, 1 331 491 (SEPI) 06 November 1963 (06.11.63), see fig.	(1)

* Special categories of cited documents: ¹⁰"A" document defining the general state of the art which is not
considered to be of particular relevance"E" earlier document but published on or after the international
filing date"L" document which may throw doubts on priority claim(s) or
which is cited to establish the publication date of another
citation or other special reason (as specified)"O" document referring to an oral disclosure, use, exhibition or
other means"P" document published prior to the international filing date but
later than the priority date claimed"T" later document published after the international filing date
or priority date and not in conflict with the application but
cited to understand the principle or theory underlying the
invention"X" document of particular relevance; the claimed invention
cannot be considered novel or cannot be considered to
involve an inventive step"Y" document of particular relevance; the claimed invention
cannot be considered to involve an inventive step when the
document is combined with one or more other such docu-
ments, such combination being obvious to a person skilled
in the art.

"A" document member of the same patent family

IV. CERTIFICATION

Date of the Actual Completion of the International Search

14 December 1990 (14.12.90)


Date of Mailing of this International Search Report

18 December 1990 (18.12.90)

International Searching Authority

AUSTRIAN PATENT OFFICE

Signature of Authorized Officer



über die internationale
Patentanmeldung
Nr.

In diesem Anhang sind
die Mitglieder der
Patentfamilien der im
obengenannten interna-
tionalen Recherchenbe-
richt angeführten
Patentdokumente ange-
geben. Diese Angaben
dienen nur zur Unterrich-
tung und erfolgen ohne
Gewähr.

tional Patent Applicati n
No. PCT/HU 90/00031

This Annex lists the patent
family members relating to
the patent documents cited
in the above-mentioned Inter-
national search report. The
Austrian Patent Office is in
no way liable for these par-
ticulars which are merely
given for the purpose of in-
formation.

relatif à la demande de
brevet international
n°.

La présente annexe indique
les membres de la famille de
brevets relatifs aux docu-
ments de brevets cités dans
le rapport de recherche inter-
national visé ci-dessus. Les
renseignements fournis sont
donnés à titre indicatif et
n'engagent pas la responsa-
bilité de l'Office autrichien
des brevets.

Im Recherchenbericht angeführtes Patent- dokument Patent document cited in search report Document de brevet cité dans le rapport de recherche	Datum der Veröffentlichung Publication date Date de publication	Mitglied(er) der Patentfamilie Patent family member(s) Membre(s) de la famille de brevets -	Datum der Veröffentlichung Publication date Date de publicati n
--	--	---	--

DE-A - 2056199

25-05-72

None

GB-A - 1446671

18-08-76

AU-A1-64249/74	10-07-75
BE-A1- 809586	02-05-74
BR-A0- 7400166	15-08-74
CH-A - 558973	14-02-75
DD- C- 111259	05-02-75
DE-A1- 2365115	18-07-74
ES-A1- 422246	01-07-77
ES-A5- 422246	01-08-77
FR-A1- 2214155	09-08-74
FR-B1- 2214155	09-09-77
IE-B - 38737	24-05-78
IL-A0- 43991	16-05-74
IT-A - 1006813	20-10-76
LU-A - 69111	02-04-74
NL-A - 7400162	16-07-74
PL- F- 88489	30-09-76
RO- F- 64303	15-03-79
SE-B - 396154	05-09-77
SE-C - 396154	15-12-77
TR-A - 18014	01-01-77
ZA-A - 7400111	24-12-74
ZM-A - 6/74	23-09-74

FR-A - 1330078

None

FR-A - 1331491

None